

DRILLING & MILLING MACHINE 钻铣床

标准附件

- 钻夹头 $\phi 16\text{mm}$
- 铣刀 $\phi 80\text{mm}$
- 锥柄接套
- 锥柄接杆
- 下刀铁
- 扳手
- 拉杆

Standard accessories

- Drill chuck $\phi 16\text{mm}$
- Cutter $\phi 80\text{mm}$
- Taper sleeve
- Arbor
- Drift
- Wrench
- Drawbar

特殊附件

- 铣夹头
- 角度平口钳
- 眼护罩
- 机架

Special accessories

- Milling chuck
- Angle vice
- Safety guard
- Stand

ZX7045 B/B1



ZX7016



ZX7025



ZX7032

齿轮式自动进刀钻铣床

GEAR HEAD AUTO-FEED DRILLING & MILLING MACHINE

特点:

- 加强型齿轮, 传动扭矩大;
- B1型配双速电机, 主轴转速范围广。

Characters:

- Gear hardened, large driven torque;
- B1 type optional 2-speed motor, wide spindle speed range.



ZX7040 B/B1

ZX7045



ZX7045B/ZX7045B1 带冷却系统 ZX7045B/ZX7045B1 With collant systems

型号 Model		ZX7016	ZX7025	ZX7032	ZX7045	ZX7040B/ ZX7040B1	ZX7045B/ ZX7045B1
最大钻孔直径 Max.Drilling capacity	mm	16	25	31.5	45	铸铁(Iron)40/ 钢(Steel)32	铸铁(Iron)45/ 钢(Steel)32
最大端铣宽度 Max.face Mill Capacity	mm	40	63	80	80	80	80
最大立铣直径 Diameter of vertical milling	mm	10	13	22	28	22	28
立柱直径 Diameter of column	mm	70	85	115	/	115	/
主轴最大行程 Spindle travel	mm	80	110	130	120	110	110
主轴中心至立柱母线距离 Distance spindle axis to column generating line	mm	182	240	202	260	261.5	260
主轴端至工作台面最大距离 Max. Distance spindle nose to table	mm	360	510	460	475	450	475
主轴端至底座工作台面最大距离 Max. Distance spindle nose to base	mm	/	/	/	/	/	/
主轴锥度 Spindle taper		MT2	MT3	MT3	MT4	MT4 or R8	MT4 or R8
主轴转速范围 Spindle speeds range	r/min	300~2870	290~2150	100~2150	95~1600	50~1250/ 50~2500	50~1250/ 50~2500
主轴转速级数 Spindle speeds series		12	5	12	6	6/12	6/12
主轴进给量 Spindle feeds	mm/r	/	/	/	/	0.12 0.18 0.25	0.12,0.18,0.25
工作台面尺寸 Dimension of worktable surface	mm	420X152	555X195	标配730X210选配820X240		标配730 X 210 选配820 X 240	标配820 X 240 选配730 X 210
工作台行程 Table travel	mm	230X120	240X140	标配450X170选配540X170		标配450 X 170 选配540 X 170	标配540 X 170 选配450 X 170
底座尺寸 Dimension of base	mm	/	/	/	/	605 X 400	605 X 558
总高 Overall height	mm	900	1130	1100	1050	1100	1100
主电动机 Main motor	W	550	750(6P)	单相1100 三相1500	单相1100 三相1500	单相1100 三相1500	单相1100 三相1500
冷却泵电机 Coolant motor	W	/	/	/	/	/	40
毛重/净重 G.W/N.W	kg	80/75(carton) 100/75(wood case)	190/160	285/250	318/278	390/350	405/360
包装尺寸 Packing dimension	cm	88X62X26.5(carton) 65X58X77(wood case)	87X67X102	86X74X124 97X77X124	86X74X124 97X77X124	86X74X124 97X77X124	104X 77 X 124
出口包装尺寸 Packing dimension	cm	/	/	86X74X116 97X77X116	86X74X116 97X77X116	86 X 74 X 116 97 X 77 X 116	104X 77 X 116

ZX7045C/ZX7045C1 数显钻铣床


Drilling & Milling Machine With DRO



ZX7045C

可选配置 Optional accessories:

二轴数显 2 Axis Position Reader

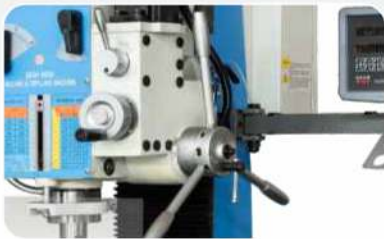

ZX7045C1配双速电机
ZX7045C1: with 2 speed motor 1.3kW/1.8kW

型号 Model		ZX7045C	ZX7045C1
最大钻孔直径 Max.drilling capacity	mm	32铸件/45铸件	32铸件/45铸件
最大端铣宽度 End milling dia.	mm	80	80
最大立铣直径 Face milling dia.	mm	28	28
主轴中心至立柱母线距离 Distance spindle axis to column surface	mm	260	260
主轴最大行程 Max.spindle travel	mm	110	110
主轴锥度 Spindle taper		MT4 or R8	MT4 or R8
主轴转速范围 Spindle speed	r/min	50-1250	50-2500
工作台面尺寸 Dimension of worktable	mm	标配820×240、选配730×240	标配820×240、选配730×240
工作台行程 Worktable travel	mm	标配540×170、选配450×170	标配540×170、选配450×170
主轴端部到工作台面最大距离 Max.distance spindle nose to worktable	mm	475	475
主电机规格 Main motor power	W	单相1100、三相1500	1300/1800
冷却泵功率 Coolant pump power	W	40	40
进给电机规格 Feed motor power	W	90	90
进给速度 Feed speed rate	mm/min	8-95	8-95
净重/毛重 N.W./G.W.	kg	330/375	330/375
包装外形尺寸 Packing dimension	mm	1080×920×1240	1080×920×1240