

CONTINUOUSLY VARIABLE SPEED POWERFUL DRILLING MACHINE



无极变速强力钻床



Z5032VP/ZB5032VP

- 将原先五档皮带盘升级为二档皮带盘无极调速，既满足大扭矩钻孔，又兼顾高速钻小孔；无需频繁打开护罩调速。
Upgrade the original belt pulley five speeds to two speeds stepless speed regulation, high torque drilling, high speed small hole drilling, no need speed-adjusting by opening the pulley cover frequently.
- 增加变频器后，实现二档无极调速，主轴转速范围广，可适宜不同材料工件加工。
Two speeds stepless speed regulation realized with variable frequency drive, wide rang of spindle speed, suitable for different materials and parts processing.
- 单相电源，三相1.5W/6P电机，单相电源强力钻孔。
Single-phase power, three-phase motor 1.5KW / 6P, powerful drilling capacity.
- 增加数显表，转速可视，旋钮调速操作方便。
Digital display, speed visible, speed regulation by knob, convenient operation.
- 欧洲标准，功能齐全，带攻丝功能、带U型眼护罩、皮带罩可开门断电功能、可带特殊附件、多轴器等。
EUR standard complete functions, with tapping function, U type safety guard, pulley cover opening electrical outage, special accessories optional, multi-spindle etc.
- 性能升级，操作方便，性价比极高。
Performance upgrade, convenient operation, high cost-effective.



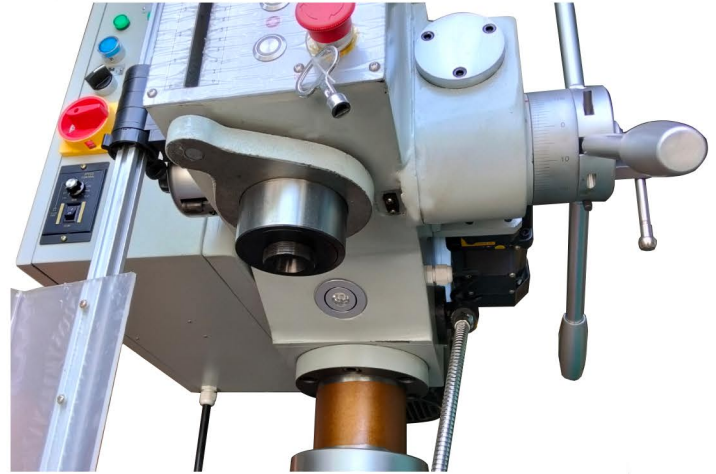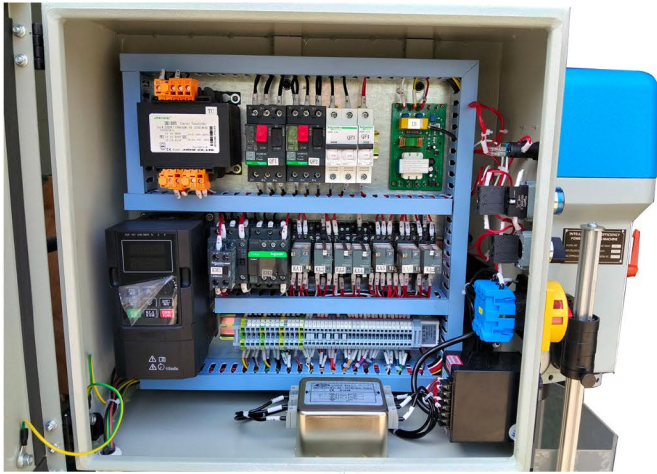

型号 Model		Z4132V/ Z4132VP	ZB4132V/ ZB4132VP	Z5032V/ Z5032VP	ZB5032V/ ZB5032VP
最大钻孔直径 Max.Drilling capacity	mm	32	32	32	32
最大攻丝直径 Max.Tapping capacity	mm	铸铁M24/钢M20	铸铁M24/钢M20	铸铁M24/钢M20	铸铁M24/钢M20
立柱直径 Diameter of column	mm	100	100	100	100
主轴最大行程 Spindle travel	mm	150	手动150/自动105	150	手动150/自动105
主轴中心到立柱轴线距离 Distance spindle axis to column generating line	mm	265	265	265	265
主轴端至工作台面最大距离 Max.Distance spindle nose to table	mm	390	390	820	820
主轴端至底座台面最大距离 Max.Distance spindle nose to base	mm	745	745	1235	1235
主轴锥度 Spindle taper	/	MT3	MT3	MT3	MT3
主轴转速范围 Spindle speeds range	(r/min)	L:100-620, H:620-3300	L:100-620, H:620-3300	L:100-620, H:620-3300	L:100-620, H:620-3300
主轴转速级数 Spindle speeds series	/	无极调速 (Variable)	无极调速 (Variable)	无极调速 (Variable)	无极调速 (Variable)
工作台面尺寸 Dimension of worktable surface	mm	380 × 400	380 × 400	380 × 400/ 330 × 330	380 × 400/ 330 × 330
底座尺寸 Dimension of base	mm	380 × 400 / 310 × 380	380 × 400 / 310 × 380	380 × 400 / 310 × 380	380 × 400 / 310 × 380
电动机功率 Motor	Kw	1.5	1.5	1.5	1.5
毛重/净重 G.W/N.W	kg	260/225	260/225	325/310	325/310
包装尺寸 Packing dimension	mm	1040 × 640 × 1050	1040 × 640 × 1050	1040 × 640 × 2050	1040 × 640 × 2050